

E140P

14 m

The GSR 'P' series is known for exceptional strength and rigidity and its simple and intuitive controls. By applying traditional and reliable technical solutions to high specification steels the 'P' series provides outstanding performance.

The combination of a telescopic boom with a single pantograph allows versatile and flexible use at height. The most significant benefit is the 'up and over' capability to work at full outreach with full safe working load at the highest point of articulation.

Robust, durable electro-hydraulic controls enable smooth operation and accuracy. Hoses are run internally for protection and brushes on each telescopic section prevent debris and dirt from entering the boom package. Individual outrigger controls allow for simple and quick levelling on uneven surfaces.


Compact and light weight the E140P can be mounted on to most popular commercial vehicles from 2.2T GVW. Outreach and outrigger configurations can be tailored to optimise different chassis'.



GB



E140P

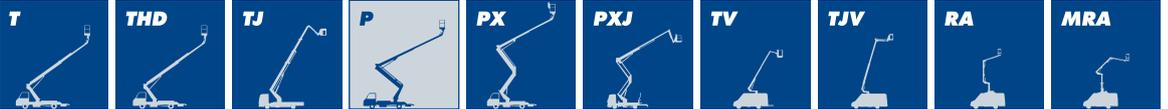

Standard features include

- Rectangular boom
- Telescopic cylinder mounted inside the booms and internal stowed hoses for maximum protection
- Cleaning brushes on all telescopic boom sections
- Turret rotation by slew drive
- Colour scheme white RAL 9010 for the aerial platform, black RAL 9011 for the cylinders
- Antislip aluminium decking
- Easy access to the basket
- Automatic basket levelling
- Aluminium or fibreglass basket
- Control panels protected against accidental collision
- Fully electric proportional controls with joystick levers
- Simultaneous and independent movements
- Vehicle engine start / stop from the basket


Safety

- Failsafe lock valves to all hydraulic cylinders
- Outrigger / Boom interlocks
- Emergency controls located on the decking
- Emergency stop at the basket and the ground control points
- Manual emergency pump
- Spirit level indicator
- Control lights in the cab indicating outriggers grounded and in stowed position
- Conformity declaration (CE)

Extra accessories

- Hour meter connected to the power take-off of the vehicle
- 230/110V wiring to the basket
- Electric emergency pump
- Mains powered electric motor for engine-off use (switched from the ground)
- Safety harness and lanyard
- Special painting
- N. 4 pvc outrigger pads
- Spotlight in the basket
- Walk-In fibreglass basket*
- 1kV double insulation*

Wide series of vehicle fittings and accessories available. For detailed information contact sales office.

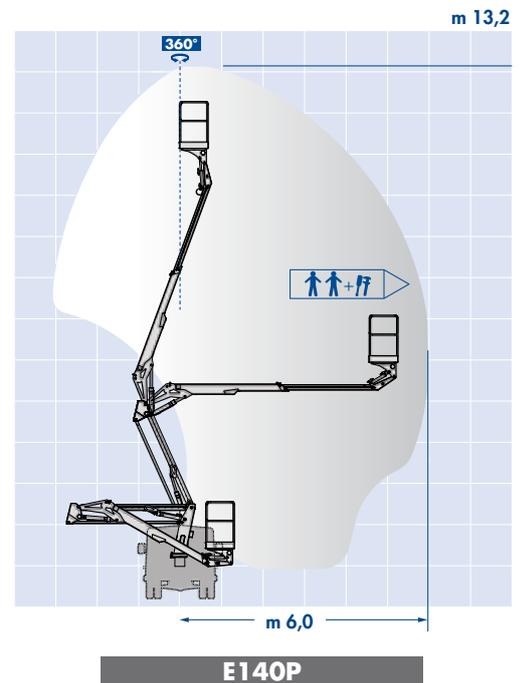

MODEL	Working Height (m)*	Max. Outreach (m)*	Basket Capacity (kg)*	Turret Rotation (°)	GVW min. (to)*
E140P	13,2	6,0	250	360	2,2 / 3,2

* Depending on vehicle



GSR SpA Via Lea Giaccaglia, 5 - 47924 Rimini (RN) - Italia
 Tel. + 39 0541 397811 - Fax + 39 0541 384491
 www.gsrspa.it e-mail: sales@gsrspa.it

Company with Quality Management System certified by DNV - ISO 9001:2008

Dealer