

# B200TJ

20 m

The GSR "TJ" series is known for the exceptional strength and rigidity of the aerial platform and its simple and intuitive operation. The high product quality and excellent performance parameters of the aerial platform with unrestricted outreach at full basket capacity are secured by applying traditional and reliable technical solutions, as well as special steels and boom profiles.

The combination of the telescopic boom with a jib and the basket position at the end of the vehicle allow fast, versatile and flexible use. With the fly jib, the user has a further movement available to place the working basket in the best position.

Protected internal hosing together with self-cleaning brushes fitted to the telescopic sections prevent dirt and debris entering the boom. The electric multifunction joysticks are housed for protection, robust and durable and allow the operator to perform all movements, even at full working height with smoothness and accuracy. Outrigger controls allow for individual leg operation ensuring effective ground contact and levelling on uneven surfaces.

The machines can be fitted on the most popular commercial vehicles starting from 3,5t. Different vehicle installations are possible by varying outrigger configurations and tailoring working envelopes to optimise each mounting.



GB



# B200TJ



## Standard features include

- Rectangular boom
- Telescopic cylinder mounted below the booms and internal housed hoses for maximum protection
- Cleaning brushes on all telescopic boom sections
- Turret rotation on self braking slewing system
- Colour scheme white RAL 9010 for the aerial platform, black RAL 9011 for the cylinders
- Antislip aluminium decking
- Easy access to the basket
- Hydraulic basket levelling
- Electric basket rotation
- Aluminium or fibreglass basket
- Control panels protected against accidental collision
- Fully electric multifunction controls with joystick levers
- Simultaneous and independent movements
- Cab protection
- Vehicle engine start / stop from the basket
- Variable jacking (depending on vehicle): full, one-side, narrow
- Automatic functions: centering and groundposition
- Outrigger activation from both the basket and base controls


## Safety

- Failsafe lock valves to all hydraulic cylinders
- Outrigger / Boom interlocks
- Emergency controls located on the base
- Emergency stop at the basket and the ground control points
- Spirit level indicator
- Control lights in the cab indicating outriggers grounded and in stowed position
- Conformity declaration (CE)

## Extra accessories

- Rotating beacon
- Hour meter connected to the pto of the vehicle
- 230/110V wiring to the basket
- Electric emergency pump
- Mains powered electric motor for engine-off use
- Automatic leveling
- Extralarge aluminium basket 1800x700mm
- Walk-In fibreglass basket
- Spotlight in the basket
- Safety harness and lanyard
- Tool box under the decking
- Special painting
- N. 4 wooden outrigger pads
- 1kV double insulation

Wide series of vehicle fittings and accessories available. For detailed information contact sales office.

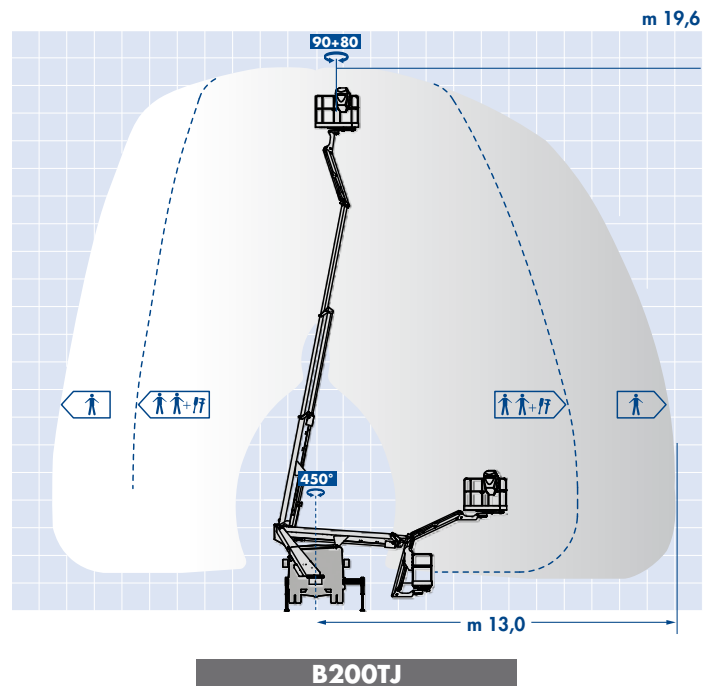

MODEL	Working Height (m)*	Max. Outreach (m)*	Basket Capacity (kg)	Turret Rotation (°)	Basket Rotation (°)	JIB Articulation (°)	GVW min. (to)*
B200TJ	19,6	13,0	250	450	90 + 80	130	3,5

\* Depending on vehicle



**GSR SpA** Via Lea Giaccaglia, 5 - 47924 Rimini (RN) - Italia  
Tel. + 39 0541 397811 - Fax + 39 0541 384491  
www.gsrspa.it e-mail: sales@gsrspa.it

Company with Quality Management System certified by DNV - ISO 9001:2008

**Dealer**